



# EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

**Certificate N° 0075/2852/162/07/19/1968**

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

**Manufacturer :** **SOCIEDAD COMERCIAL DE MARKETING M&V SPA**  
Av. Americo Vespuccio Norte 2880 of 304 Conchali Santiago Chile

**Description**

**PPE Type :** *protective glove against mechanical risks, cold risks*  
**Product reference :** **FLEX 99**  
**Article code :** /  
**Glove description :** **7 G POLYESTER TERRY AND BRUSHING LINER WITH LATEX COATED GLOVES,CRINKLE FINISH.**  
**Available sizes :** **8 9 10 11**

**Pictures :**



**Reference standard :**

**Levels of performance / class of protection**

**EN 420:2003+A1:2009**

-

**EN 388:2016**

**4 1 4 2 X**

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

**EN 511 : 2006**

**X 2 X**

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 01 dated from JULY 2019

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425.

**Issued in Lyon by**  
**Maxence DREVET**  
Project Certification Manager

**Date of first issue :** 01 July 2019  
**End of validity date :** 01 July 2024



Original CTC



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.

[www.ctcgroupe.com](http://www.ctcgroupe.com)

[cemarking@ctcgroupe.com](mailto:cemarking@ctcgroupe.com)

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France  
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - [ctclyon@ctcgroupe.com](mailto:ctclyon@ctcgroupe.com)

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie  
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

**SOCIEDAD COMERCIAL DE MARKETING M&V SPA**

**MANUFACTURER'S TECHNICAL FILE TO THE  
PPE REGULATION 2016/425**

<b>Reference of the product</b>	<b>:</b>	<b>FLEX 99</b>
<b>Article code</b>	<b>:</b>	<b>/</b>
<b>Technical file index</b>	<b>:</b>	<b>01</b>
<b>Last update</b>	<b>:</b>	<b>JULY 2019</b>

## IDENTIFICATION

Reference of the product :	:	FLEX 99
Article code :	:	/
Basic Model		
Technical file index :	:	01
Last update :	:	JULY 2019

### **Manufacturer :**

SOCIEDAD COMERCIAL DE MARKETING M&V SPA  
Av. Americo Vespucio Norte 2880 of 304 Conchali Santiago

Chile

tel : +56226233381

fax : +56973353782

## GLOVE DESCRIPTION

### General glove description :

7 G POLYESTER TERRY AND BRUSHING LINER WITH LATEX COATED GLOVES, CRINKLE FINISH.  
type of coating finish : crinkle

### Visual description (picture back and palm sides) :



### Field of use

Automobile Industry, Mechanical Maintenance, Construction site and handling of cold parts

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)			
		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§2.14	Multi-risk PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.7	Protection against cold	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking

### Available sizes :

Minimum length of glove (mm)	Sizes
250mm	8
260mm	9
270mm	10
280mm	11

## **Glove constitution :**

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
Palm		black	latex	460g/m2		1.3mm
		orange	polyester	450g/m2	7	
Back		orange	polyester	450g/m2	7	
Cuff		orange	polyester/elastic	350g/m2	7	
Binding		black	polyester			

## **PROTECTION SCOPE**

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.  
This glove is designed for against mechanical risks, cold risks.  
It is a category II product.

## **GENERAL REQUIREMENTS**

### **Standard EN 420 : 2003 + A1 : 2009**

Dexterity : 5

Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

## **SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS**

### **Mechanical hazard EN 388 : 2016**

<b>Protection offered</b>	<b>Performance levels</b>
Abrasion resistance	4
Blade cut resistance	1
Tear strength resistance	4
Puncture resistance	2
Cut Resistance method (EN ISO 13997)	X
Impact Protection	-

The levels of performance have been measured on the palm

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

## Cold hazard EN 511 : 2006

	Minimum performance level require	Performance obtained
Abrasion resistance	1	4
Tear strength	1	4
Flexibility behaviour for coated materials	no crack	conform
Extreme cold flexibility for glove resistant to -30°C	no crack	not conform
Convective cold	—	X
Contact cold	—	2
Water penetration	0 or 1	X

## TEST REPORTS

Laboratory	CTC	Other
EN 420 + innocuousness	S180708888_1 S180506940_2(DMFU) S180100936_1(DMFU) S170201234_1	
EN 388	S180708888_1 S170607359_1 S181013549_1	
EN 511	S180708887_1	

## MARKING - PACKAGING

### Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : FLEX 99

Article Code : /

Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or Serial number :

### Marking example :



**RESISTOR**<sup>®</sup>



Av. Américo Vesputio Norte 2880 of 304,  
Conchalí, Santiago, Chile

**Method of marking on the glove :**

printing on the back of the glove

**Packaging :**

12pairs/poly-bag;60pairs/carton

**PPE subject to ageing :**

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

**Declaration of conformity :**

Available with product.

**MEANS OF CONTROL**

We have quality control department,before the mass production,we will make the pre-production to test,after the testing pass,then we start to mass production.

Every one hour we will check the quality from the productions,to control the quality.

Our main goal is increasing our market share and becoming a worldwide brand with our high quality standard products.we'll reproduce then check by QC ,then we send them to test EN388,EN420,EN511...in CTC each year .

For realizing this goal,our main objective is to increase the expertise,knowledge and awareness level of our employees,to decrease the costs by working more efficiently,to increase our sales with high quality and competitive products.

## INSTRUCTION FOR USE

### SOCIEDAD COMERCIAL DE MARKETING M&V SPA

Av. Americo Vespucio Norte 2880 of 304 Conchali Santiago  
Chile

Glove reference : FLEX 99

Article code: /

User notice index : 01

Last update : JULY 2019

Available sizes : 8 9 10 11


### RESISTOR®



Av. Américo Vespucio Norte 2880 of 304,  
Conchali, Santiago, Chile

### RESISTOR®

Sociedad Comercial de Marketing M&V Spa  
Av. Américo Vespucio Norte 2880 of 304, Conchali, Santiago, Chile

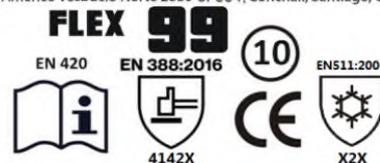

#### **Glove description :**

7 G POLYESTER TERRY AND BRUSHING LINER WITH LATEX COATED GLOVES, CRINKLE FINISH.

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the PPE Regulation 2016/425 applicable from April 21th, 2018 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)  
4, rue Hermann Frenkel  
69367 LYON Cedex 07  
FRANCE

#### **Applicable standards :**

The glove meets the requirements of the standard EN 420 : 2003 + A1 : 2009 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :

##### Application :

Mechanical hazard - EN 388 : 2016



4 1 4 2 X

Levels of performance

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	4	(on 4 maxi)
Puncture resistance	2	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	X	(A to F)
Impact Protection		

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

##### Application :

Cold risk - EN 511 : 2006



X2X

Levels of performance

Convective cold	X	(on 4 maxi)
Contact cold	2	(on 4 maxi)
Water penetration	X	

**Protection limit :**

*This glove doesn't give a protection for a temperature under -50°C.*

*Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.*

*This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.*

*The protection against risks or hazards which are not mentioned in this document is not warranted.*

*The levels of performance mentioned are only valid for the palm of the glove.*

*The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.*

*These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.*

*This glove shall not be in contact with fire*

*Contains natural rubber latex, which could cause allergic reaction, including anaphylactic choc.*

*Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).*

*For gloves with different layers of material, the performance levels are warranted only for the whole glove.*

*The performance levels can be reduced due to a level X of water penetration.*

*For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.*

**Storage and cleaning notice**

*Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.*

**PPE subject to ageing :**

*The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).*

**Declaration of conformity :**

*Available with product.*